


0757-27836588 0757-27830166
528308 Q Q 294872678
zhengyi@zhengyi.cc
www.zhengyi.cc

Export Department:

ZHENGYI GLASS MACHINERY CO.,LTD.

Add: No.28 SanFang Road, Lunjiao, Shunde, Foshan, China.

Tel: +86-757-27889799 Fax: +86-757-27830166

Phone: +86 13326780588 

E-mail: foreign@zhengyi.cc

Http: www.zhengyimachine.com



Website



ZHENGYI GLASS MACHINERY CO.,LTD.

C Company Profile






ZHENGYI GLASS MACHINERY CO.,LTD is a high-tech enterprise focusing on the design, development, production, sales and service of glass deep processing machinery and equipment. Innovation and Technology, Chi-made edging; A leap year and the years of rapid development, now entering the pipeline, diversified, high-tech production track, basis of 20 years of professional and technical; breaking the domestic Originally "imported high-quality and high price, domestic cheaper and low quality" into two glass machinery market pattern. Glass machinery market in the domestic, our Zhengyi is intended to maintain a high degree of concern, and production and sales, and achieved good results overseas Southeast Asia and Middle East, Europe and the United States.

Since its inception, Zhengyi is intended to adhere to the product-oriented, adhere to international quality, the price for the business strategy, products adhere closer to the consumer groups, small but efficient route. With advanced technology of glass edging machine, providing customers with a full glass of mechanical solutions. At present, our products including: glass beveling machine series, edging machine series, washing machine series, sandblasting machine series, drilling machine series, Glass special shape series and glass double edger automatic processing line equipment and so on, and many varieties glass processing machinery.

"developing by technology, integrity and responsibility" is intended to advocate the modern corporate culture, always adhere to the "Chi-made glass edging more efficient" innovative ideas; will continue adhering to the scientific enterprise management, and dedicated to the entrepreneurial spirit, continue to break through self-effort to build a first-class international enterprise; do the world's most competitive supplier of choice for glass machinery work!



Exported To More Than 60 Countries

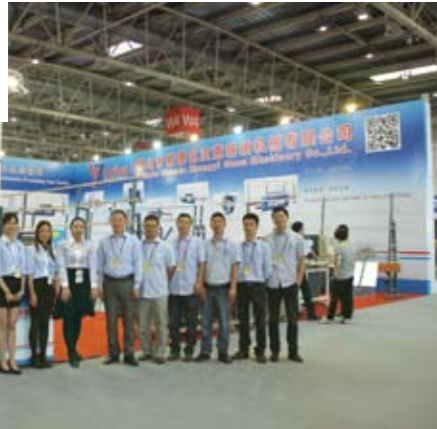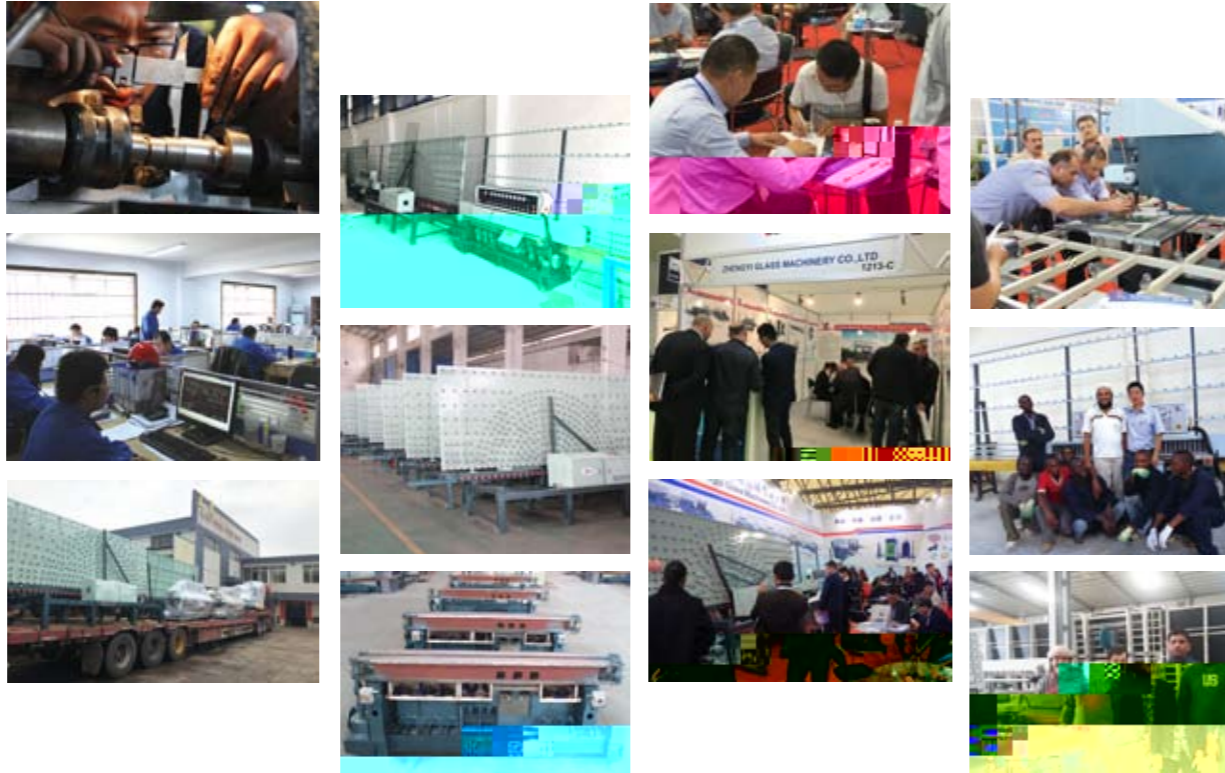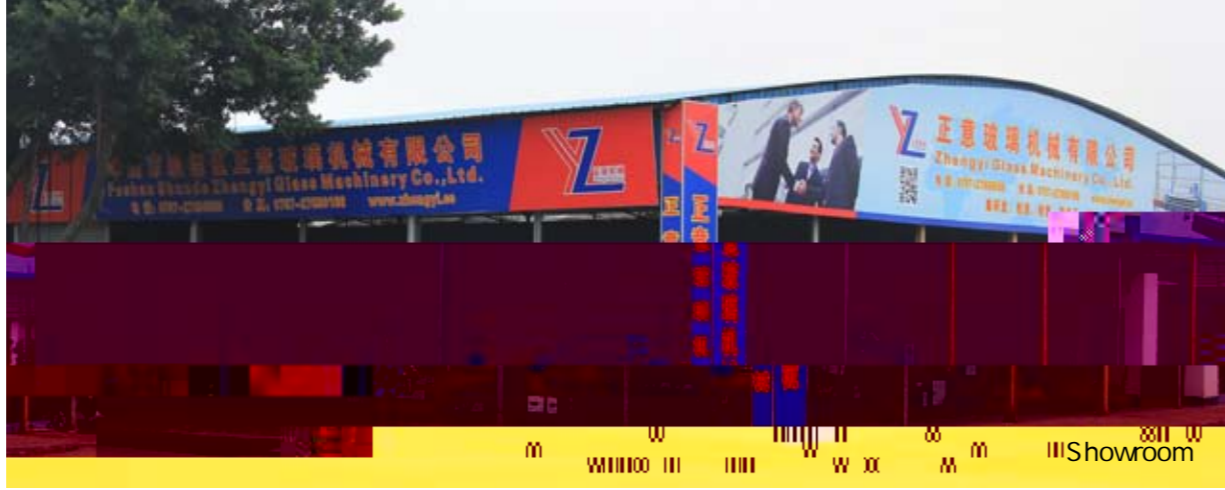

www.zhengyi.cc







CONTENTS

Beveling Machine	P5-8	Sandblasting Machine	P23-25
Automatic Machine	P9-10	Special Grinding Machine	P26
Edging Machine	P11-15	Fillet Machine	P27
Round Edging Machine	P16	Drilling Machine	P28
Double Edging Machine	P17-18	Cutting Machine	P29
Washing Machine	P19-22	Stone Machinery	P30





Model								
ZXM361	100x100mm	0-45mm	3-30°	0.5-4.5m/min	3-19mm	23kw	4000kg	7.0x1.2x2.5m
ZXM371	100x100mm	0-50mm	3-30°	0.5-4.5m/min	3-19mm	25kw	4800kg	7.6x1.2x2.5m

The glass straight line edger machine production line is consist of one set of automatic vertical glass loading machine, four sets of glass straight line edger machine, four sets of vertical transfer tables, one set vertical transfer table, one set of vertical unloading machine. You can choose the model and quantity of the machines which you need to combination one production line. This kind of production line can greatly improved all kind of bevel edger ,straight edge, round edger, 45 degree multi-beveling and etc that kind of glass processing. Not only efficiently, but also can save manpower & safety.

This kind of production line is initiated by ZhengYi, reflect the company adheres to "smart drive glass edge grinding

1

2

3

4

5



6

7

8

PLC


- 1.The transmission of input and output parts are separate control, the part of input,output,transfer arm are control of independent variable frequency motor. There is no need to leave a large space before and after the glass. Similar to the speed of manual to input the glass, improve the efficiency and safety of production.
2. Automatic reduction in glass landing, the transfer arm has automatic reduction function, protection of glass without break the edge.
3. Loading arm fell back quickly and high efficient to connect the next piece of glass;
4. Instead of the input and output guide of original machinery , save area and omitted the wastage of the original conveyor belt;
5. The input and output part of transferring table can be add the conveyor chain or synchronous belt to auxiliary conveying glass;
6. The transmission parts are divided into two sections, and the lifting function of the output part can adjust the amount of glass grinding.
7. Transferring table is control by PLC, touch screen operation;
8. Configurable control cabinet, overall control of the processing speed and glass thickness.

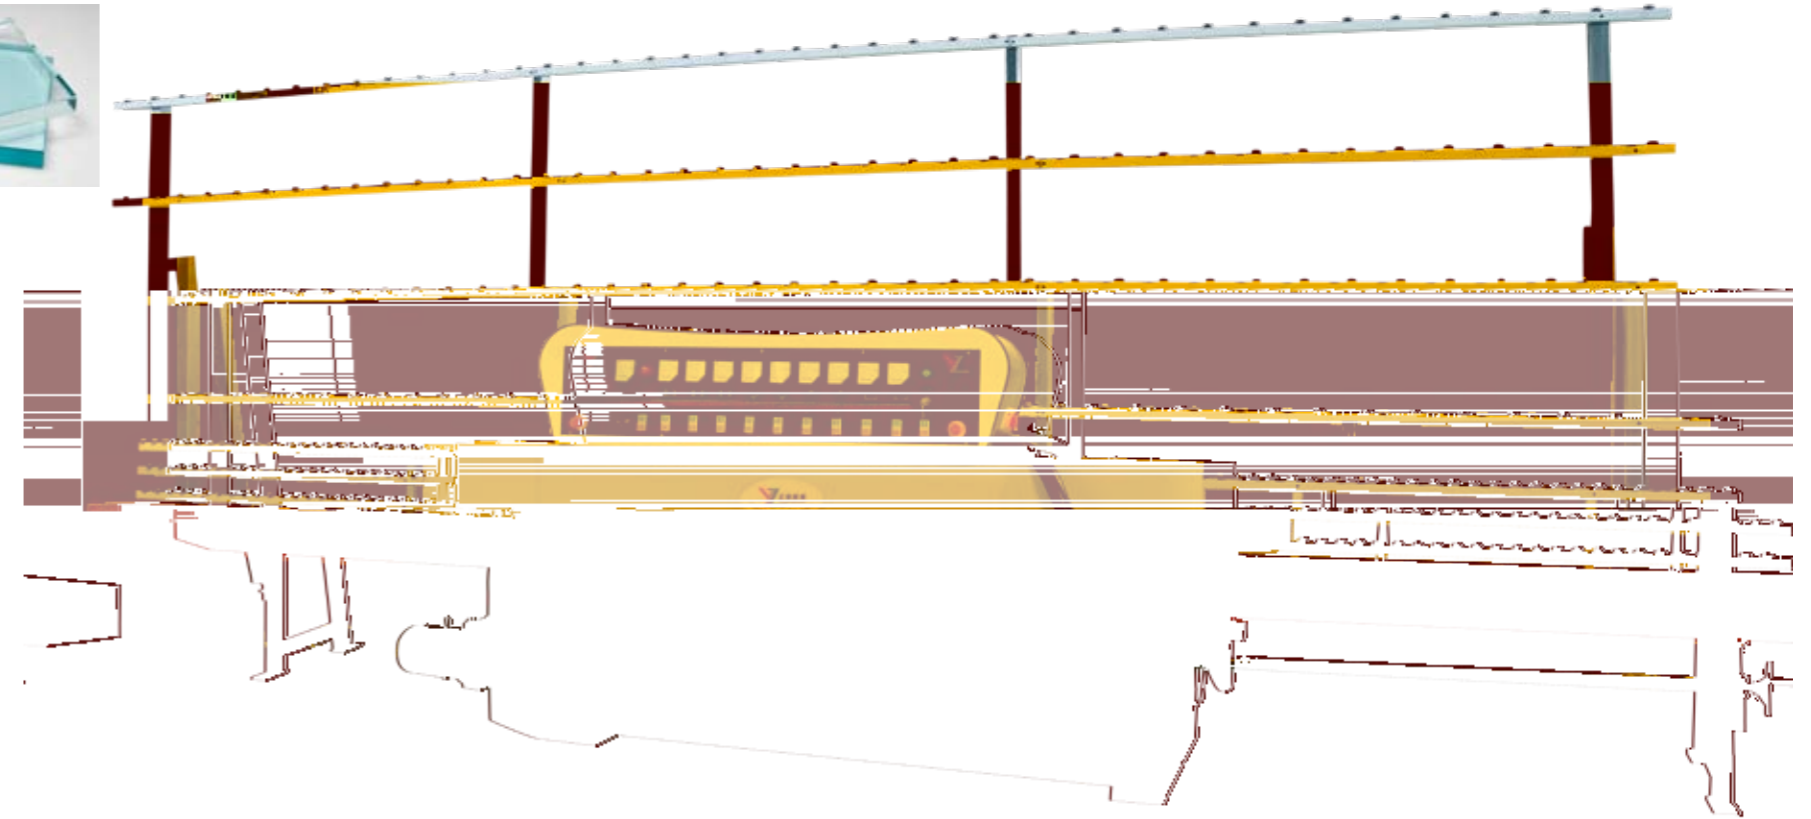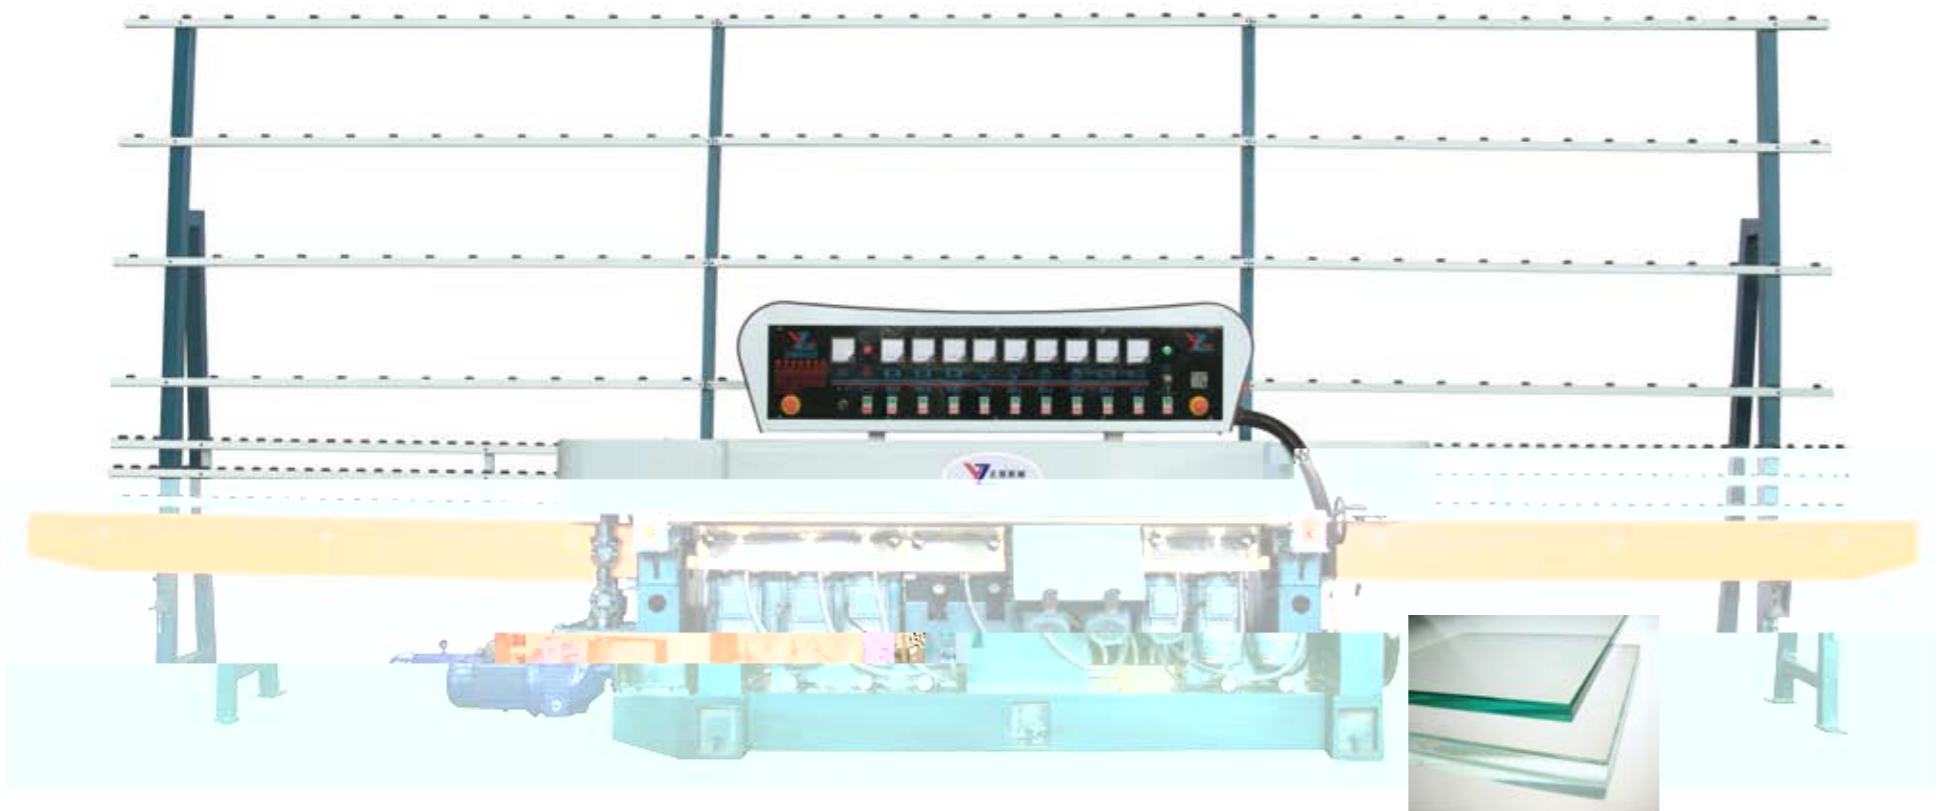

Characteristics:

The ZM9325 series glass straight line edging machine is suitable for different size and thickness flat glass grinding, it can rough grinding fine grinding and polishing finish in one time; the polishing flat is similar to the smooth degree of glass body, While adjusting the different processing thickness, you can reference the digital display in front beam to adjust front chamfer motor can move synchronically with front beam; with advanced structure; high precision easy operation. It is the necessary tool for glass machinery.


Model	MIN					
ZM4325	80x80mm	1.3-7.5m/min	3-25mm	9kw	1800kg	5.7x1.0x2.5m
ZM9325	80x80mm	1.3-7.5m/min	3-25mm	18.5kw	2800kg	6.8x1.0x2.5m
ZM10325	80x80mm	1.3-7.5m/min	3-25mm	21kw	3000kg	7.0x1.0x2.5m

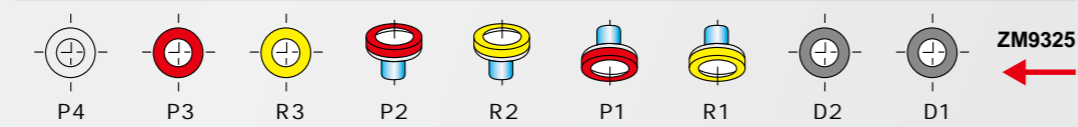

Characteristics:

- 1.This machine is the version of old ZM9325, new surface, and improved multiple operating mode, that can operate much convenient ;
- 2.A special design of the in-feed section for controlling the desired amount of glass removal without adjusting each spindle individually.
- 3.The thickness of processed glass is adjusting by electric control, that can ecreased the working time, and improved the work efficiency.
- 4.Timing belt transmission,can be processing more small and more accurately glass.

Model	MIN					
ZM9325A	50x50mm	1.3-7.5m/min	3-25mm	18.5kw	2800kg	6.8x1.0x2.5m

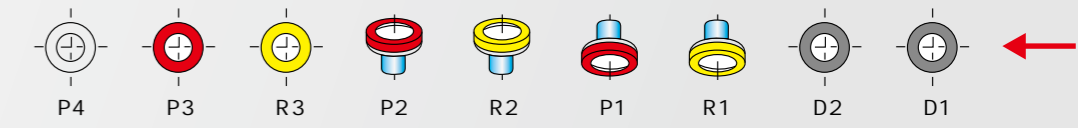

45°





5 4 45°

Model							

Characteristics:

The 11motors machine is mainly used for grinding bottom edges and large edges of flat glass, its grinding motor are very reasonably distributed, 5 pcs of which are used for grinding bottom edges, 4pcs for grinding 45-degree sharp edges, it can be used for precisely grinding flat bottom edges and 45-degree sharp edges of glass. The machine has highly practical, simply operation, it is suitable for professional furniture, doors, windows, kitchen, craft, construction glass grinding.



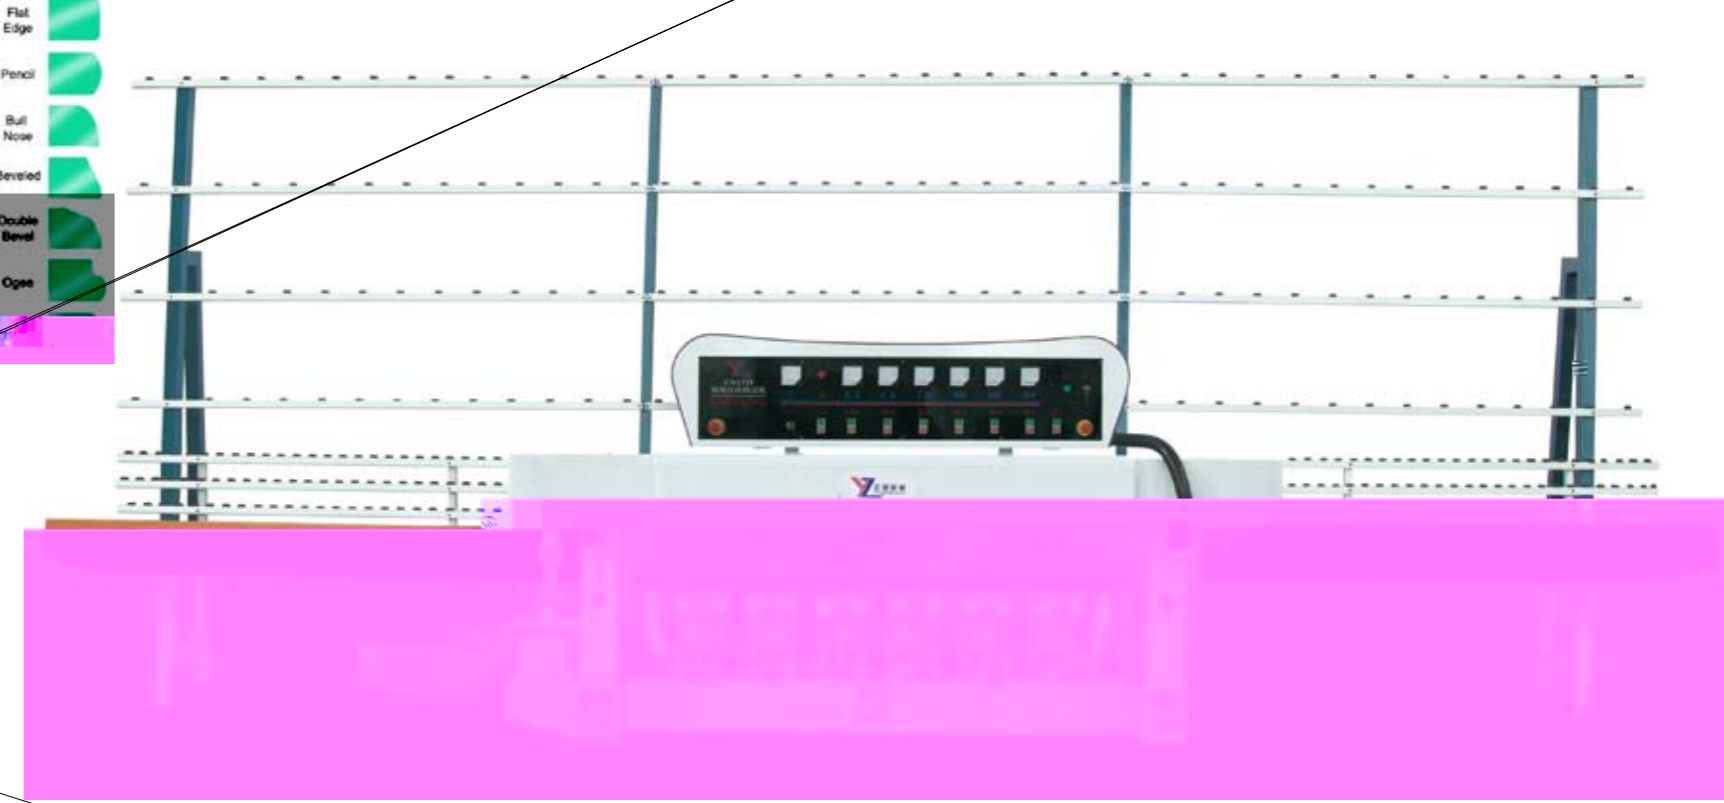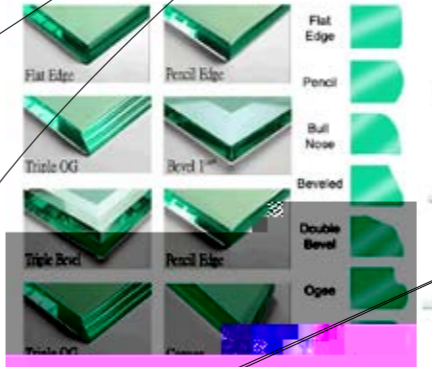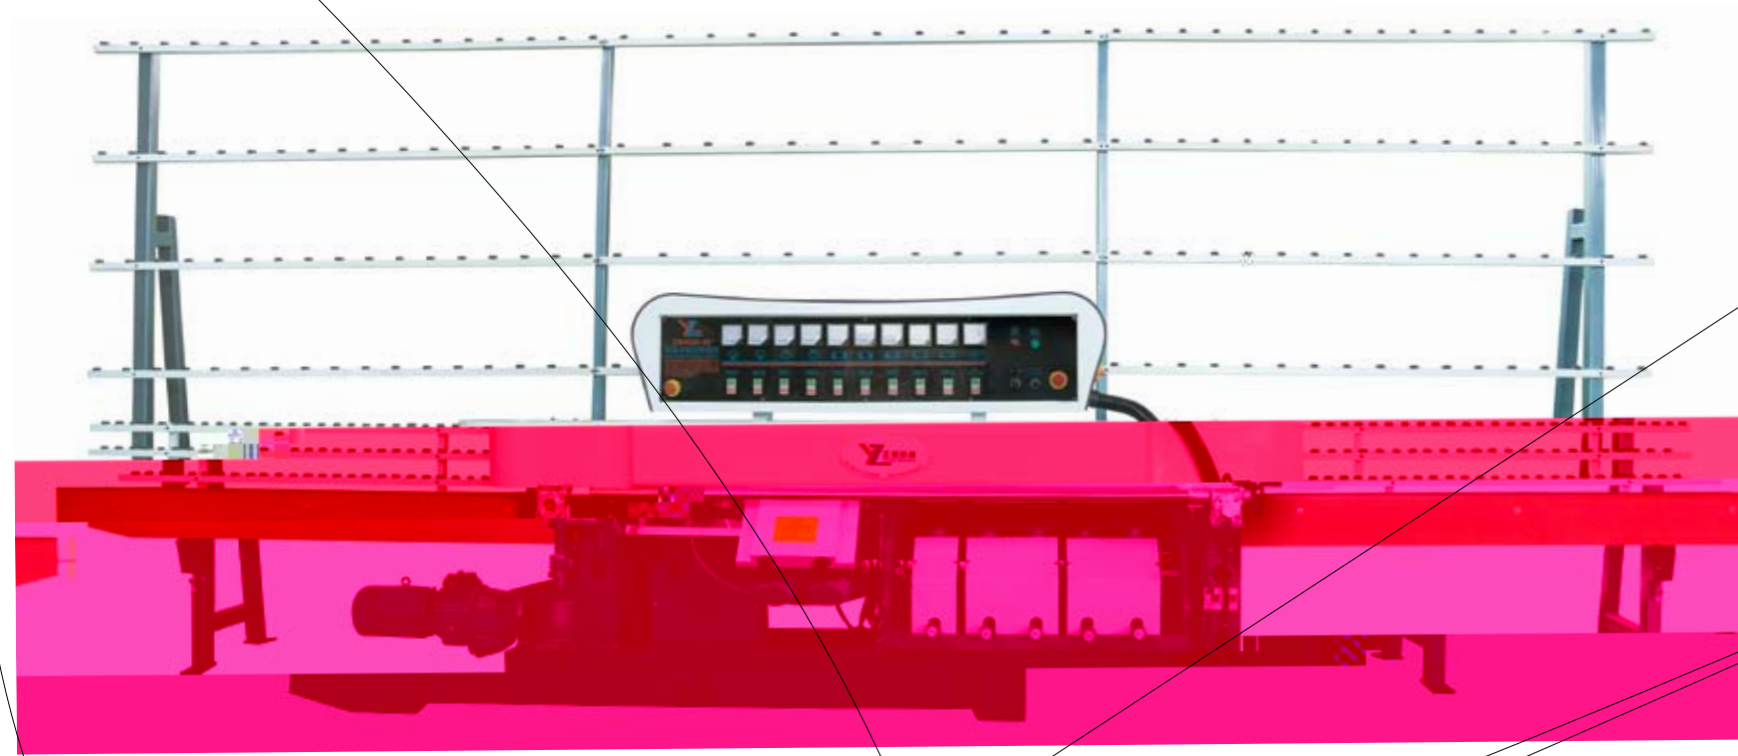


ZM9325-45° 45° 90° 5

45°


Characteristics:
 ZM9325-45° machine is basic on glass straight line edging machine to increase the grinding multi-level edge functionality; 5pcs bottom motors can whole electric swing angle, any angle between 45° to 90° edging. It is through many times grinding to grind out many lines in the glass edge, that achieve the multi-stage edge. The machine can process straight edge, multilevel edge, 45° edge, it can finish coarse, fine grinding and polishing in one time. The edge after processing will such as the bright surface of the glass.


Model	MIN						
ZM9325-45°	100x100mm	45°-90°	1-6m/min	3-25mm	19kw	3000kg	6.8x1.0x2.5m
ZM11325-45°	100x100mm	45°-90°	1-6m/min	3-25mm	22kw	3500kg	7.3x1.3x2.5m

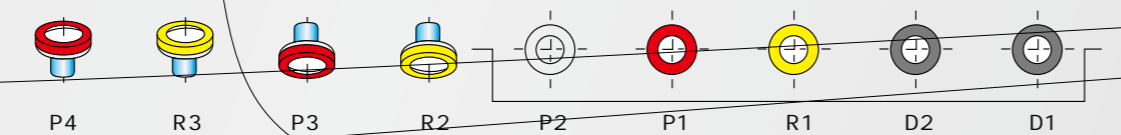







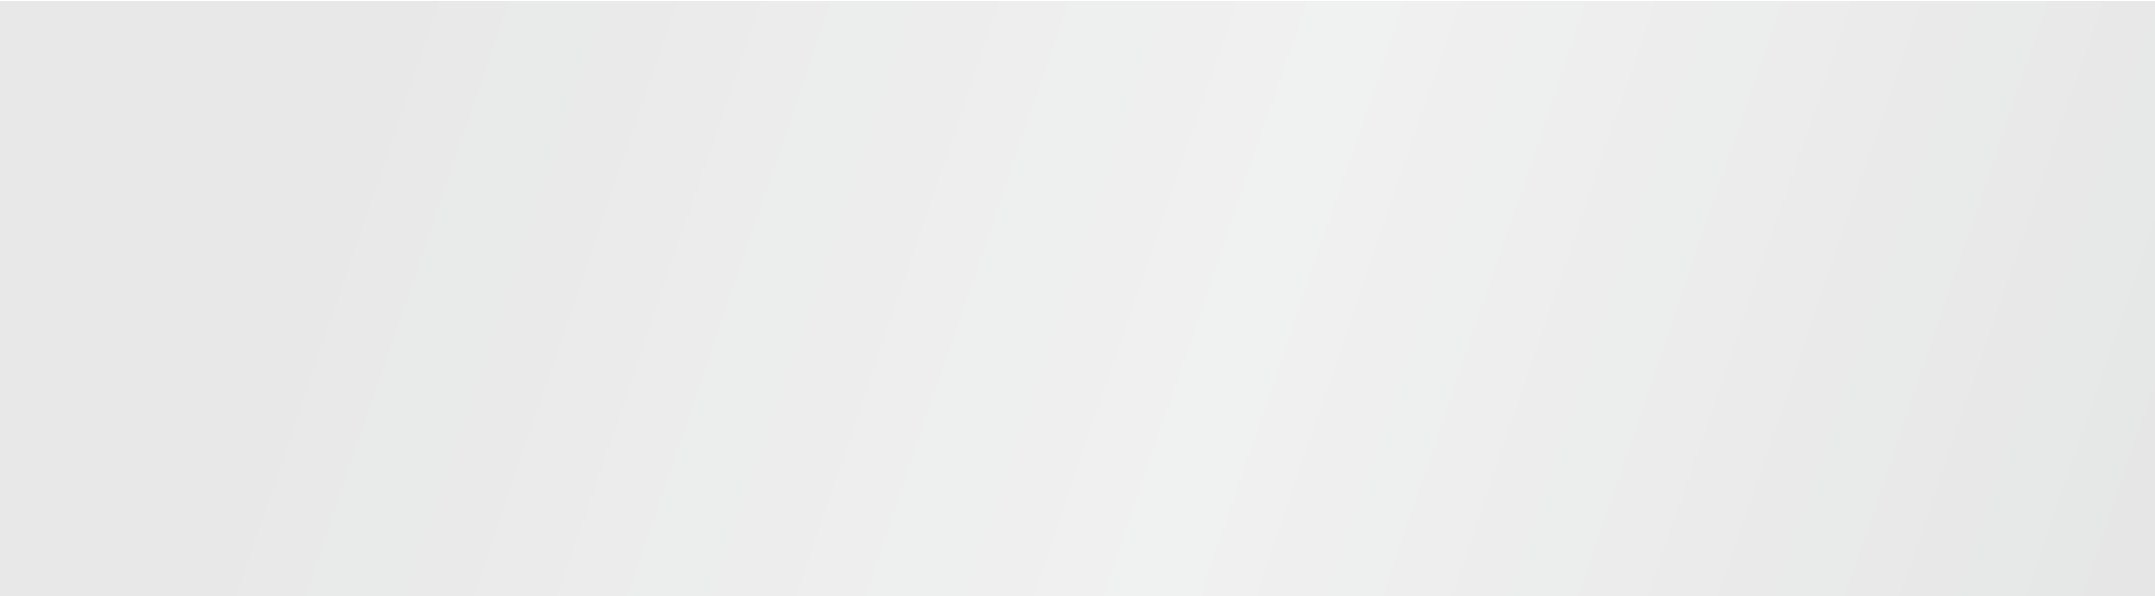
Characteristics:
 The 6 motors Glass Straight Line Round Edging Machine is specially designed to grind rectilinear OG, DOG, TOG, pencil edge, Flat-Edge Grinding & Other Profiles using various wheels according to different thickness of glass. It used shaping-wheel rough wheel and fine grinding wheel to be grinded and polished, and it can grind high-accuracy high-quality glass. It used with stepless speed-changer to transfer, you can change the processing speed in your requirement.









Model						
ZYM6320	50x50mm	1-6m/min	3-20mm	13.5kw	2600kg	6.2x1.0x2.5m
ZYM7320	50x50mm	1-6m/min	3-20mm	14.1kw	2800kg	6.5x1.0x2.5m





Characteristics:

Model							
ZYX1200A	70×70mm	1150×2000mm	0.75-3.5m/min	3-12mm	11kw	1000kg	3.8×1.2×1.0m
ZYX1600B	350×350mm	1600×2000mm	0-7m/min	3-19mm	17kw	1600kg	4.2×2.50×2.85m

Model								
ZYX500	30×30mm	450×1500mm	1-5m/min	1-5mm	4×3	9KW	550KG	1.9×0.9×1.0m
ZYX800	150×150mm	750×2000mm	1-5m/min	2-15mm	4×3	10KW	750KG	2.8×1.3×1.0m
ZYX1200	150×150mm	1150×2440mm	1-5m/min	2-19mm	4×3	12KW	900KG	3.4×1.6×1.0m
ZYX1600	200×200mm	1550×2440mm	1-5m/min	2-19mm	4×4	13KW	1050KG	4.0×2.0×1.1m
ZYX2000	300×300mm	2000×3000mm	0.8-3.5m/min	3-19mm	4×4	14KW	1250KG	4.0×2.4×1.1m

3.25m

3mm-50mm


Low-E


18m/min

Characteristics:

ZYX2500 series glass washing machine is special designed for tempering line, laminating line, coated glass line. It combined function of three step washing, used with frequency device driving system, which is easy to wash different size glass. Washing area installed with stainless steel or other special treatment steel. The glass processing thickness is 3-50mm, the max speed can reach 12m/min, the max width can reach 3.25m; the washing part and drying part can overall lifting, digital display; machine can be design according to customer requirement

Model							
ZYX2000A							

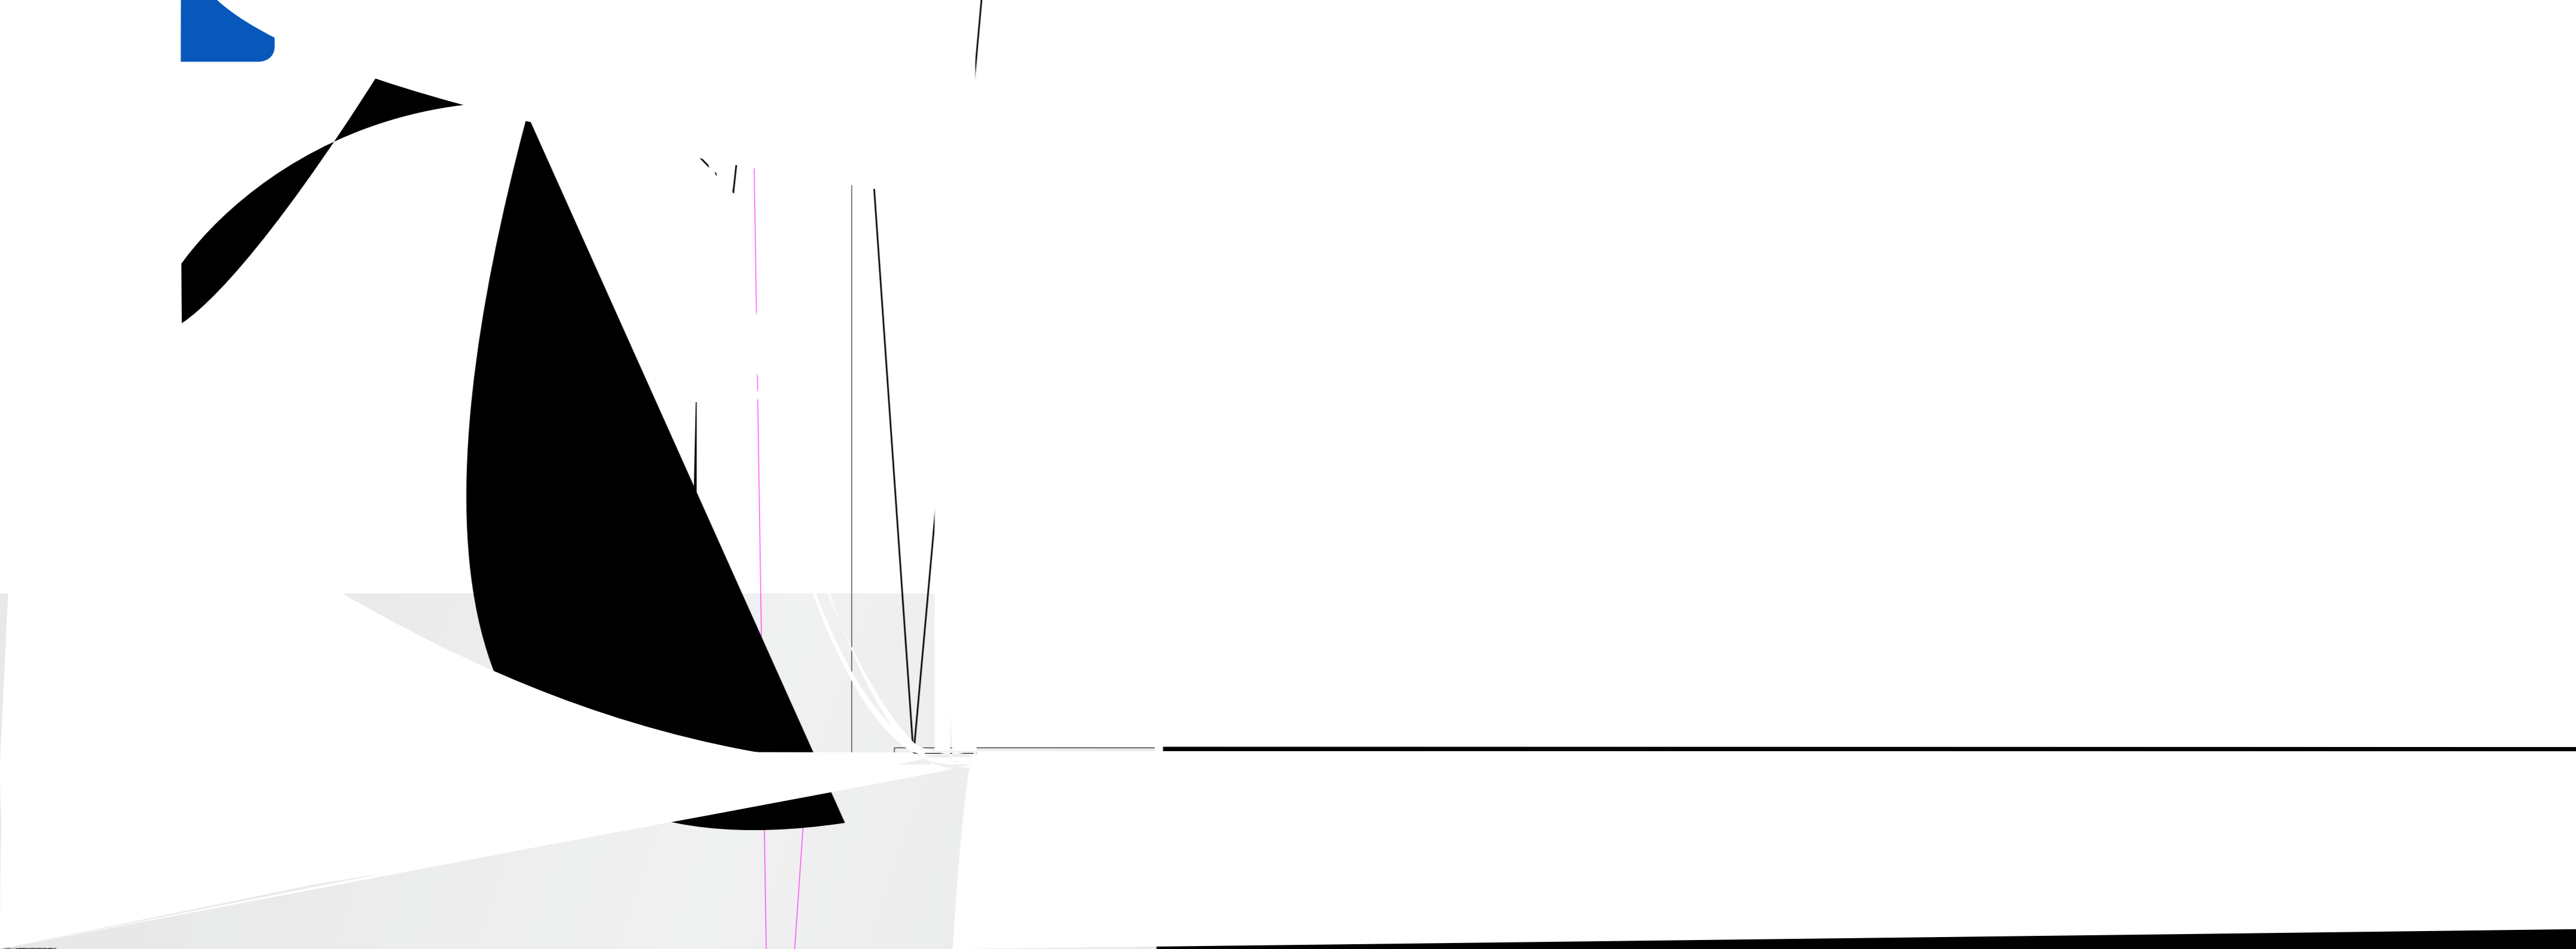

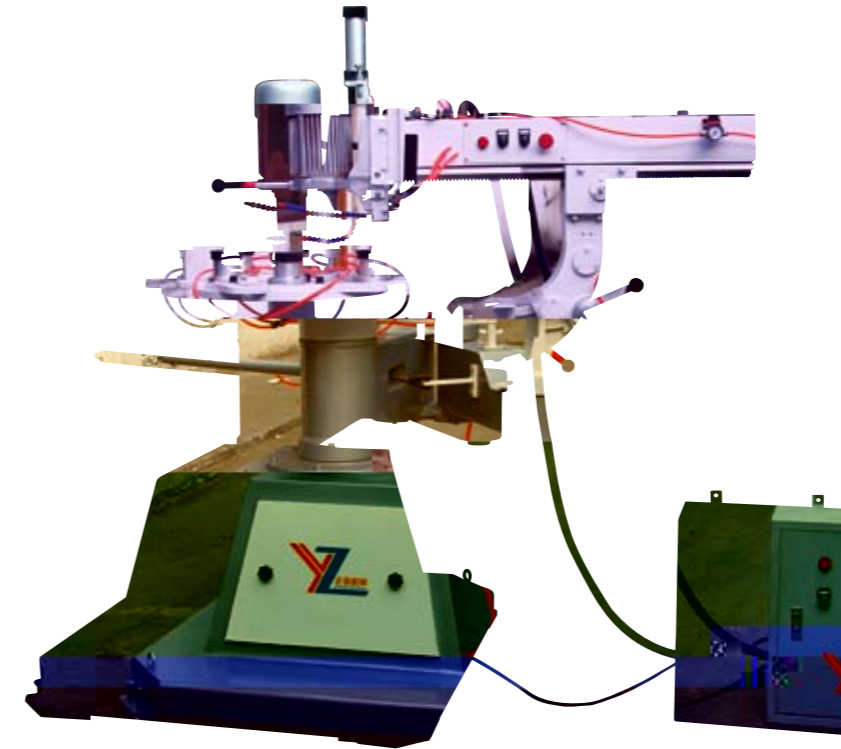

ZDS

3-30mm,

Characteristics:

ZDS series Horizontal automatic glass sandblasting machine is the latest improved environmental protection product. Glass sandblasting once completed, sand blasting perfectly homogeneous, automatic sand dust Drain away the dust with a special water tank filter through liquid gas exchange, to achieve the best effect of dust environmental protection, domestic glass sandblasting is preferred. Sandblasting glass thickness is 3-30mm, with marble, ceramic, stainless steel etc.

Model	MAX				
ZDS1300	1200mm	36m ² /h	4.8kw	1500kg	3.0x2.0x1.85m
ZDS1800	1700mm	50m ² /h	5.2kw	1600kg	3.7x2.8x1.85m
ZDS2000	1900mm	57m ² /h	6.5kw	2000kg	3.8x2.9x1.85m
ZDS2600	2500mm	75m ² /h	7.8kw	2200kg	4.2x3.4x1.85m

ZNWM1320

Characteristics:

ZNWM1320 is applied for processing interior & exterior circular edges, elliptical and unconventional-shape edging machine with dual modes of manual and pneumatic operations.

Model							
ZNWM1320 ZDYM1320	130-2100mm	0-15°	0.5-2.5r/min	3-30mm	2.6kw	1000kg	1.5x1.5x1.7m

ZDYM1320

Characteristics:

ZDYM1320 glass shape and beveling machine is suitable for processing perimeter and bevel edges of round and oval shaped glass. It uses satellite wheel for rotation, the wheel rotation speed can be adjusted during work. This machine can also be used for semi-auto grinding of simple special shaped glass. When grinding peripheral edges, it can use three grinding wheels for coarse and fine grinding and polishing. When grinding bevel edges, it can use a bowl shaped grinding wheel, the grinding head can be tilted back, and the bevel angle can be adjusted for end face grinding.

